


Corrente de Transmissão TRIPLA

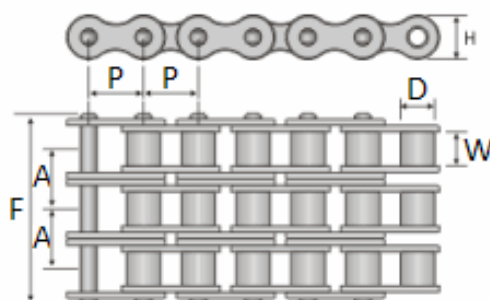

Corrente de transmissão tripla Norma AMERICANA ASA

Referência	Passo		Entre placas	Diâm. Rolo	Altura placa	Pino		Passo Transv.	Carga Ruptura	Peso
						Diâm.	Altura			
	P		W	D	H	-	F	A	Mín.	
ANSI	Pol.	mm	mm	mm	mm	mm	mm	mm	Kgf	Kg/m
35/3	3/8	9,53	4,77	5,80	7,3	3,58	32,3	10,13	2750	0,97
40/3	1/2	12,70	7,95	7,92	10,2	3,96	45,2	14,38	5000	1,70
50/3	5/8	15,88	9,53	10,16	13,0	5,08	56,5	18,11	8390	2,90
60/3	3/4	19,05	12,70	11,91	18,0	5,94	71,5	22,78	11500	4,30
80/3	1	25,40	15,88	15,88	24,0	7,92	92,5	29,29	30000	7,40
100/3	1.1/4	31,75	19,05	19,05	29,6	9,53	113,0	35,76	31200	11,90
120/3	1.1/2	38,10	25,40	22,23	36,0	11,10	142,0	45,44	45100	18,10
140/3	1.3/4	44,45	25,40	25,40	42,0	12,70	153,0	48,87	61900	23,15
160/3	2	50,80	31,75	25,58	48,0	14,27	183,0	58,55	79100	30,10
200/3	2.1/2	63,50	38,10	39,67	57,2	19,85	222,3	71,55	130500	47,95
240/3	3	76,20	47,63	47,62	71,8	23,81	269,9	87,83	176100	75,20

Corrente de transmissão tripla Norma EUROPÉIA DIN

Referência	Passo		Entre placas	Diâm. Rolo	Altura placa	Pino		Passo Transv.	Carga Ruptura	Peso
						Diâm.	Altura			
	P		W	D	H	-	F	F	Mín.	
ISO ABNT	Pol.	mm	mm	mm	mm	mm	mm	mm	Kgf	Kg/m
06-B3	3/8	9,53	5,72	6,35	8,3	3,28	33,1	10,24	3100	1,13
08-B3	1/2	12,70	7,75	8,51	11,8	4,45	44,2	13,92	5400	2,05
10-B3	5/8	15,88	9,70	10,16	14,0	5,08	52,2	16,59	7600	2,64
12-B3	1	25,40	17,00	12,07	18,0	5,72	61,1	19,46	9100	3,70
16-B3	3/4	19,05	11,70	15,88	21,0	8,28	99,8	31,88	18250	8,20
20-B3	1.1/4	31,75	19,60	19,05	25,5	10,19	114,5	36,45	25100	12,10
24-B3	1.1/2	38,10	25,40	25,40	33,7	14,63	151,3	48,36	45130	21,15
28-B3	1.3/4	44,45	31,00	27,94	34,5	15,90	186,0	59,56	58200	24,90
32-B3	2	50,80	31,00	29,21	40,5	17,81	182,3	58,55	70100	28,19
40-B3	2.1/2	63,50	38,10	39,37	53,0	22,89	225,5	72,29	116000	48,19
48-B3	3	76,20	45,70	48,26	63,9	29,24	282,0	91,21	179100	75,10