




Unidades de Rolamentos com Mancais Tipo Flange MSF

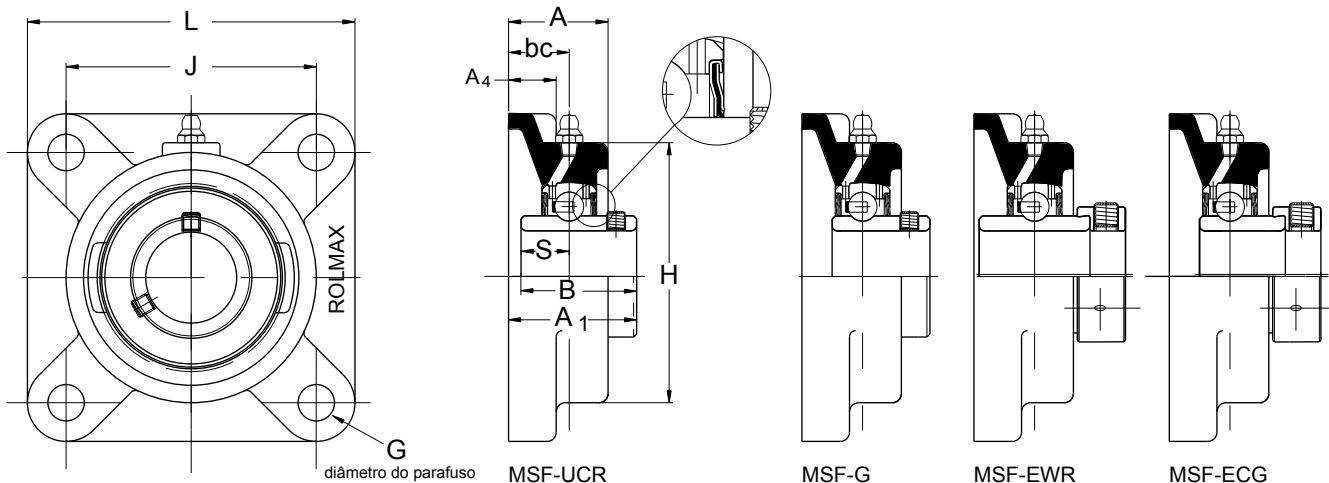

Diâmetro do eixo mm	polegada	Conjunto	Série do rolamento opcional p/ montagem (+)				Dimensões em milímetros e polegadas										Mancal	Rolamento Base	Peso kg Médio
			UCR	EWR	G	ECG	L	J	H	A ₁	A	A ₄	B	S	G	bc			
25	-	MSF-25	+				108 4.252	82,50 3.248	82,50 3.248	42,22 1.622	32,80 1.291	15,70 0,618	38,10 1.500	15,88 0,625	10 3/8	20 0,787	F-4	206/1230	1,19
	7/8	MSF-7/8	+																
	1	MSF-1	+																
30	-	MSF-30	+				117,50 4.626	92 3.622	95 3.740	45,40 1.787	33 1.299	14,20 0,559	42,88 1.688	17,48 0,688	12 1/2	20 0,787	F-5	207/1235	1,51
	1.3/16	MSF-1.3/16	+																
	1.1/4	MSF-1.1/4	+	+	+	+													
35	-	MSF-35	+				130 5.118	101,50 3.996	108 4.252	53,18 2.093	37,40 1.472	15,20 0,598	49,23 1.938	19,05 0,750	12 1/2	23 0,905	F-6	208/1240	2,17
	1.3/8	MSF-1.3/8	+																
	1.7/16	MSF-1.7/16	+																
40	-	MSF-40	+				136,50 5.374	105 4.134	111 4.370	53,18 2.093	36,80 1.448	15,80 0,622	49,23 1.938	19,05 0,750	16 5/8	23 0,905	F-7	209 / 1245	2,23
	1.1/2	MSF-1.1/2	+																
45	-	MSF-45	+				143 5.630	111 4.370	116 4.567	58,54 2.304	43,70 1.720	18,30 0,720	51,59 2.031	19,05 0,750	16 5/8	26 1.024	F-8	210/1250	2,78
	1.11/16	MSF-1.11/16	+																
	1.3/4	MSF-1.3/4	+																
50	-	MSF-50	+	+			162 6.378	130 5.118	133 5.237	62,33 2.453	47,70 1.877	21,50 0,846	55,55 2.187	22,22 0,875	16 5/8	29 1.142	F-9	211	4,11
	1.7/8	MSF-1.7/8	+																
	1.15/16	MSF-1.15/16	+																
-	2	MSF-2	+	+															
55	-	MSF-55	+				174,50 6.870	143 5.630	138 5.433	68,17 2.684	48 1.890	18 0.709	65,07 2.562	25,40 1.000	16 5/8	28,50 1.122	F-10	212	4,42
	2.3/16	MSF-2.3/16	+																
60	-	MSF-60	+				187 7.363	149,22 5.875	155 6.102	77,87 3.065	48,10 1.894	18,50 0,729	74,63 2.938	30,23 1.190	16 5/8	33,50 1.319	F-11	214	5,96
	-	MSF-65	+	+															
	2.7/16	MSF-2.7/16	+	+															
65	-	MSF-65 R	+	+			197 7.756	152,40 6.000	165 6.496	81,07 3.192	51,80 2.040	23,50 0,925	77,77 3.062	33,35 1.313	20 3/4	36,60 1.441	F-12	215	7,12
	2.11/16	MSF-70	+	+															
	2.1/2	MSF-2.1/2	+	+															
75	-	MSF-75	+				197 7.756	152,40 6.000	171 6.733	89,02 3.505	55,50 2.185	23,50 0,925	82,55 3.250	33,35 1.313	20 3/4	39,80 1.566	F-13	216	7,20
	2.15/16	MSF-2.15/16	+																
	3	MSF-3	+																
80	-	MSF-80	+				214 8.425	171,45 6.750	184 7.244	89,78 3.535	54,80 2.158	26,50 1.044	85,72 1.044	34,19 3.375	20 3/4	38,25 1.505	F-14	217	8,47
	3.3/16	MSF-3.3/16	+																
	3.1/4	MSF-3.1/4	+																
85	-	MSF-85	+				214 8.425	171,45 6.750	197 7.756	100,91 3.973	62,20 2.449	26,50 1.044	96,04 3.781	39,73 1.564	20 3/4	44,60 1.755	F-15	218	10,06
	3.7/16	MSF-90	+																
	3.1/2	MSF-3.7/16	+																
90	-	MSF-95	3095 G				214 8.425	211,12 8.312	235 9.252	127,10 5.004	84 3.307	32,50 1.280	117,48 1.280	49,25 1.939	24 1	58,80 2.314	F-16	3095	19,62
	3.15/16	MSF-100	3095 G																
	4	MSF-3.15/16	3095 G																
95	-	MSF-4	3095 G				268 10.551	211,12 8.312	235 9.252	127,10 5.004	84 3.307	32,50 1.280	117,48 1.280	49,25 1.939	24 1	58,80 2.314	F-16	3095	19,62