




# Unidades de Rolamentos com Mancais em Aço Estampado Tipo Flange SLFL

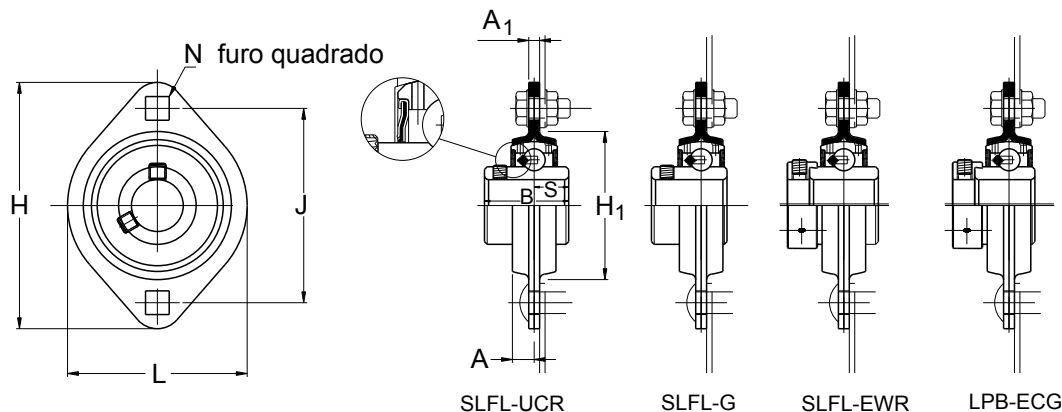

Diâmetro do eixo		Conjunto	Série do rolamento opcional p/ montagem (+)				Dimensões em milímetros e polegadas								Mancal	Rolamento base	Peso kg Médio	
			UCR	EWR	G	ECG	L	J	H	H <sub>1</sub>	A	A <sub>1</sub>	B	S				N
mm	polegada																	
20	-	SLFL-20	+	+	+	+	65,70	71,50	90,40	52,20	8,40	4,50	30,96	12,70	8,50	SLFL-2	204 / 1220	0,25
-	3/4	SLFL-3/4	+	+	+	+	2.586	2.815	3.559	2.055	0.330	0.177	1.219	0.500	0.334			
25	-	SLFL-25	+	+	+	+	71,15	76	95,70	57	8,70	4,50	34,11	14,27	8,50	SLFL-3	205 / 1225	0,30
-	7/8	SLFL-7/8	+	+	+	+	2.801	2.992	3.767	2.244	0.342	0.177	1.343	0.562	0.334			
-	15/16	SLFL-15/16	+	+	+	+												
-	1	SLFL-1	+	+	+	+												
25	-	SLFL-25R	+				83,75	90,50	113	68	9,10	4,50	38,10	15,88	10,50	SLFL-4	206 / 1230	0,51
30	-	SLFL-30	+	+	+	+												
-	7/8	SLFL-7/8R	+															
-	1	SLFL-1 R	+															
-	1.1/8	SLFL-1.1/8	+															
-	1.3/16	SLFL-1.3/16	+	+	+	+												
-	1.1/4	SLFL-1.1/4	+	+	+	+												
30	-	SLFL-30 R	+				93,70	100	122,40	80	10,60	5,30	42,88	17,48	10,50	SLFL-5	207 / 1235	0,70
35	-	SLFL-35	+	+	+	+												
-	1.3/16	SLFL-1.3/16R	+															
-	1.1/4	SLFL-1.1/4 R	+															
-	1.3/8	SLFL-1.3/8	+	+	+	+												
-	1.7/16	SLFL-1.7/16	+	+	+	+												